CL Challenger Lifts



14K 4-POST

4P14

Challenger's 14,000 lb. closed-front drive-on 4-post lift features a low approach angle and wide runways for easy approach. It also has one of the highest rise in the industry and durable column construction.

REQUIREMENTS

1

78" + VEHICLE



14' RECOMMENDED



25'-28'REC.



208-230V, 1PH, 20A



CONCRETE

4" thick, reinforced, free from cracks/seams, 3500+ psi & cured 28+ days

SPECIFICATIONS

PART NUMBER	4P14EFX	4P14XFX
Overall Length (A)	20' 5¾"	22' 9¼"
Overall Width (B)	10' 10¾"	
Inside Columns (C)	9' 8"	
Between Columns (D)	16' 4"	18' 7½"
Height of Columns (E)	7' 6½"	
Height of Runways (F)	71/4"	
Width of Runways (G)	20"	
Width Between Runways (H)	40" / 43"	
Min/Max Wheelbase (I)	89¾"/182½"	103%"/210"
Rise Height (J)	6' 6"	
Rise Time	75s	
Min. Bay Size	14' x 25'	12' x 28'
ALI® Certified	Ø	





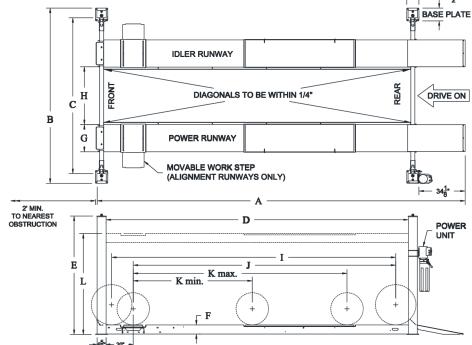


Fig 1 – General Specifications and Service Bay Layout