



12806 170 Street, Unit 16 Edmonton, AB T5L 1H7  
Phone: 780-628-0845 [www.quantumlift.ca](http://www.quantumlift.ca)

# ATLAS PVL-15

## ALI Certified 15,000 lbs. Capacity

### Two Post Lift





**The Atlas Platinum PVL-15 is an ALI CERTIFIED**, commercial grade, overhead two-post lift designed to accommodate both long wheel base trucks and service trucks. The Atlas Platinum PVL-15 has an overall height of 174 1/2" (14' 6 1/2"), but can be extended by an extra 2 feet to accommodate taller vehicles with the Height Extension Kit.

This product features an ALLY Hydraulic AL2300 Power Unit. This premium power unit is certified by MET Laboratories Inc. for electrical compliance in the United States and Canada. Extra heavy-duty armatures and more motor windings with increased silver metal included in the wires and connections create far less heat generation and allow ALLY Hydraulic power units to maintain constant torque through the lifting process. This power unit also carries an industry leading two year limited warranty.

### **Features**

5 Year Structural & 2 Year Hydraulic Warranty  
15,000 lb. Capacity  
Adjustable Height - 14' 6 1/2" or 16' 6 1/2" (With optional height extension)  
Professional grade arm lock restraint system  
Higher quality powder coating  
Dual Point Lock Release  
Truck adapter set included  
Mounting Hardware Included  
Optional Height Extension Not Included  
Shipping Weight: 2,400 LB.



## **Atlas Apex 15 Specifications**

**Capacity - 15,000 lb.**

**Overall Height - without height extension - 174 1/2" (14' 6 1/2")**

**Height To Shut Off Bar - 164 1/4" (13' 8 1/4")**

**Overall Width (With Motor) - 154 1/2" (12' 10 1/2")**

**Overall Width (Without Motor) - 148" (12' 4")**

**Outside Column to Outside Column - 135" (11' 3")**

**Maximum Lifting Height (Without Truck Adapters) - 72 3/4" (6' 3/4")**

**Maximum Lifting Height (With Truck Adapters) - 87 1/2" (7' 3 1/2")**

**Adapter Sizes 10" and 5" with 2 3/4" peg**

**Minimum Pad Height - 5 3/4"**

**Clearance Between Columns - 119 1/4" (9' 11 1/4")**

**Drive Thru - 107 1/2" (8' 11 1/2")**

**Arm Length - 36" - 52" (3' - 4' 4")**

**Column Size - 14 1/2" x 8"**

**Thickness of Steel - 8mm**


**Cable Diameter - .375"**

**Motor/Electrical Requirement - 220 Volt, Single (1) Phase;**

**A 30 amp Breaker Is Recommended**

**Oil Requirement - 3-5 Gallons AW32/AW46**

**Shipping Weight - 2,400 lb.**

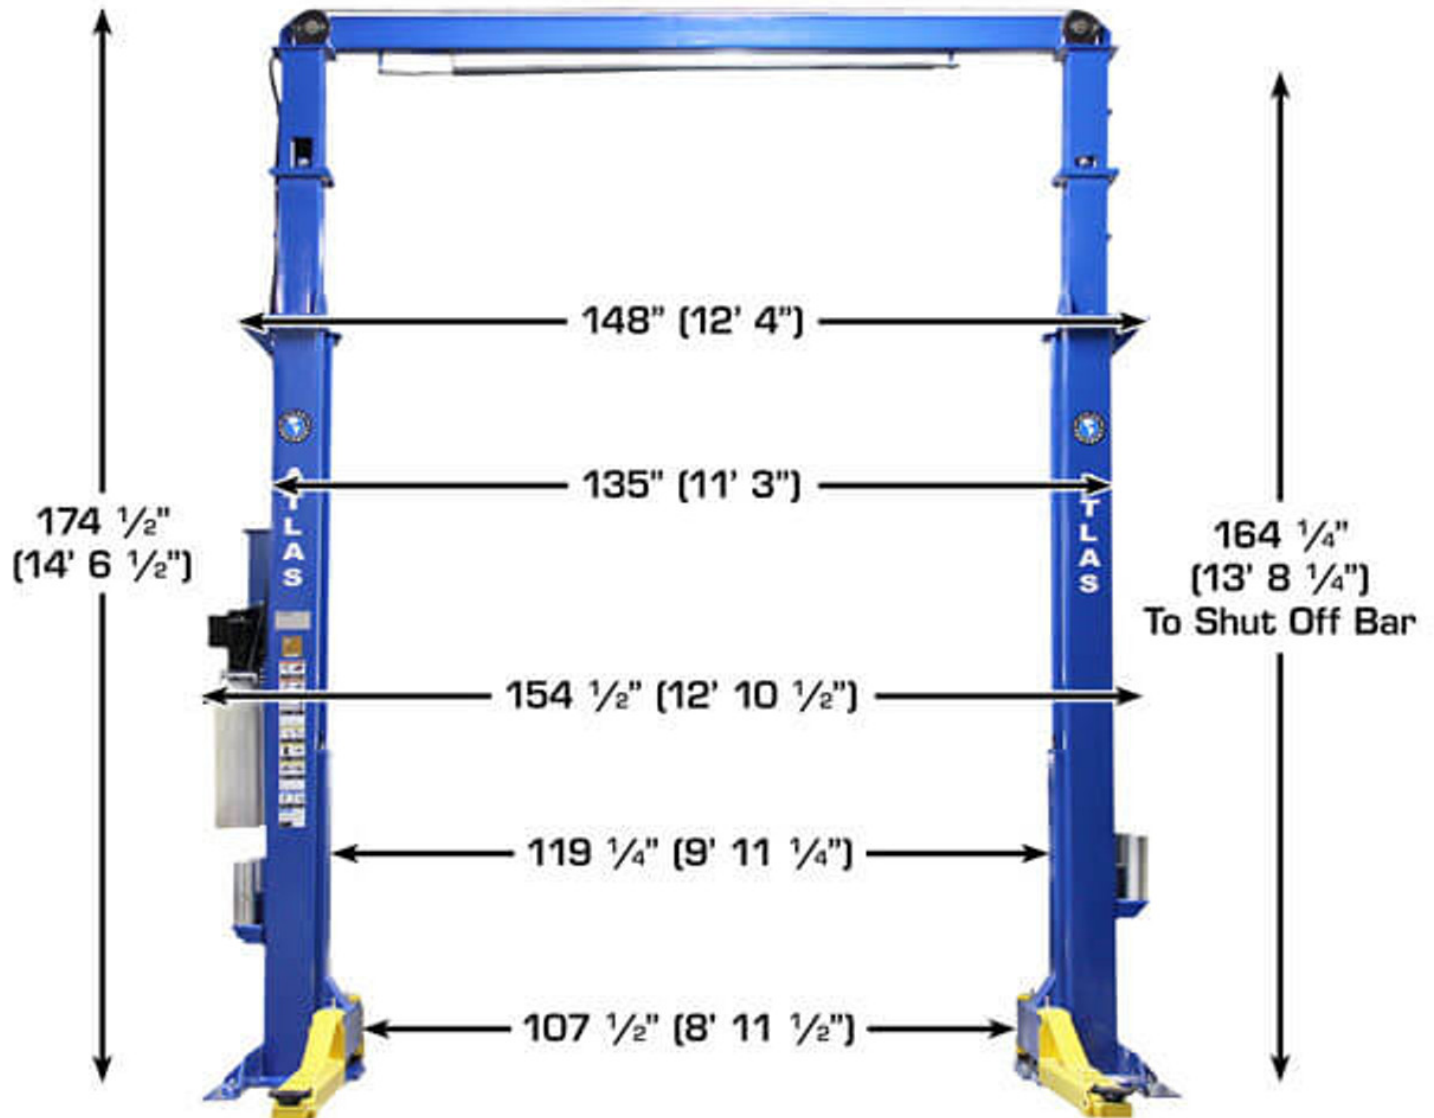



Two-Stage Symmetric  
Arm Configuration

