




12806 170 Street, Unit 16 Edmonton, AB T5L 1H7 Phone: 780-628-0845 www.quantumlift.ca





ATLAS Platinum PVL-9BP ALI Certified Baseplate 9,000 lbs. Capacity 2 Post Above Ground Car Lift





The Atlas Platinum PVL-9BP is an ALI CERTIFIED, 9000 LB capacity, base-plate two-post lift designed for professional service centers. The open-top design of this lift makes it ideal for garages with low ceilings. The total column height is 111 1/8" (9' 3 1/8"). The Atlas Platinum PVL-9BP can lift a range of the most common vehicles on the market, both foreign and domestic, while also having the capacity to handle both full-size pickups and is backed by one of the Industry's best warranties.

This product features an ALLY Hydraulic AL3000 Power Unit. This premium power unit is certified by MET Laboratories Inc. for electrical compliance in the United States and Canada. Extra heavy-duty armatures and more motor windings with increased silver metal, included in the wires and connections, create far less heat generation. The armatures and motor windings also allow ALLY Hydraulic power units to maintain constant torque through the lifting process. This power unit also carries an industry leading two-year


limited warranty.


Features


9,000 lb. Capacity
Symmetric Arms
Base Plate Design
Dual Hydraulic Chain-Drive Cylinders
Secondary Lock System (SLS)
Free 8 Piece Truck Adapter Set
Automatic Arm Restraints
Dual Point Lock Release
Designed For Low Ceiling Clearance - 9' 3 1/8" Columns
Mounting Hardware Included
Shipping Weight: 1,700 lbs.









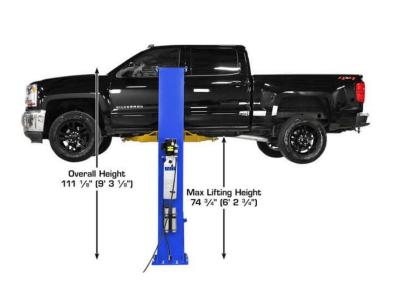


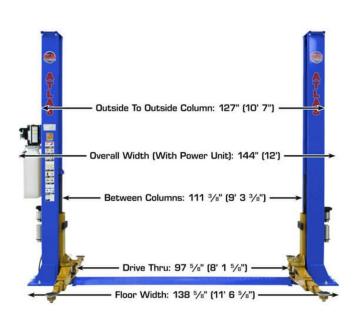




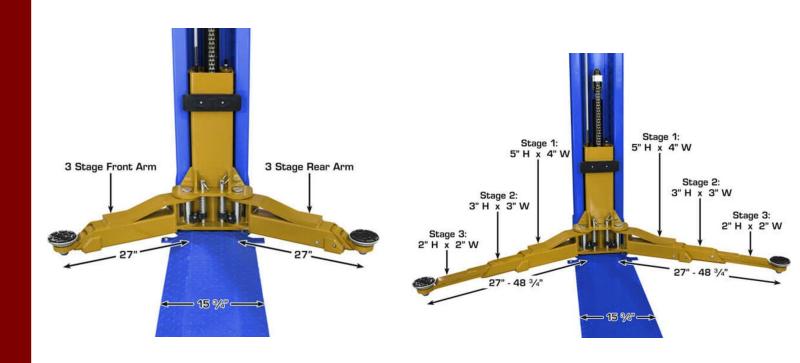


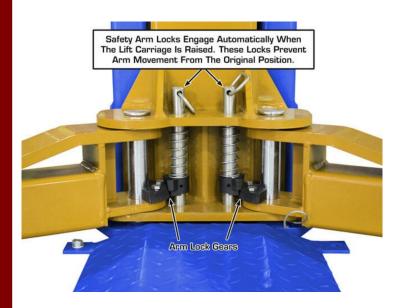

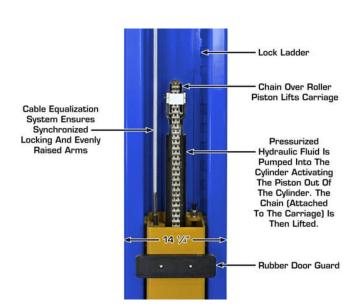






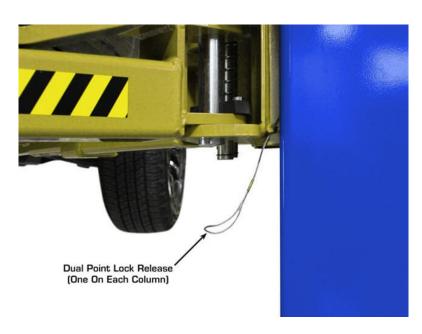



Truck Adapter Holder On Each Column





Specifications

Capacity

Overall Height

Overall Floor Width

Outside Column to Outside Column

Maximum Lift Height (Without Adapters)

Maximum Lift Height (With Adapters)

Minimum Arm Height

Inside Column

Drive Thru

Column Size

Column Thickness of Steel

Base Of Lift

Motor/Electrical Requirement

Oil Requirement

Shipping Weight

Adapter Heights

Arm Hole/Adapter Peg Size

9,000 LB.

111 1/8" (9' 3 1/8")

138 5/8" (11' 6 5/8")

127 1/2" (10' 7 1/2")

74 3/4"

83 3/4"

4 1/2"

111 3/8" (9' 3 3/8")

97 5/8" (8' 1 5/8")

7 5/8" x 14 1/4"

6mm

19 1/2" x 20 1/2"

220 volt single (1) phase.

A 30 amp breaker is recommended

3-5 Gallons AW32/AW46 (NOT INCLUDED)

1,700 LBS.

4 Each 3", 6"

2"

Requires a minimum of 6" of concrete with a 3000 psi. rating

