MODEL TR-25 SPECIFICATIONS

 Capacity:
 25,000 lbs.

 Lifting Speed:
 120 seconds

Motor Rating: 2 HP/220 V Single-Phase

(3 phase optional)

Lifting Mechanism: 5" Hydraulic Cylinder Attached to (4)

#646 Leaf Chains

Overall Length: 27'-3" (with 20' runways)

Track Length: 16'9", 20' 25' or 30'

Overall Width: 12' 6"

Lifting Stroke: 5'

Height @ Full Stroke: 5' 9 5/16" (top of runways)

Track Width: 24"

Track Adjustment: 4' to 8'

Clearance Between Posts: 11' Standard (Wider Available)

Mechanical Safety Release: Single Point

Mechanical Safety Locks: Multi-Positions

Back-Up Hydraulic

Safety Systems: Pressure Compensated Flow Controls

& Velocity Fuses

Concrete requirements: 4000 PSI concrete 4 $\frac{1}{2}$ " thick floor


Warranty: 3 years; (Excluding Motor/Pump)

Lift Weight: 5250 lbs (with 20' tracks)

Available Options

- 3' track extensions: front, rear, or both
- 3 phase power: 208/230 3 phase 60 hz/460 volt 3 phase 60 hz 380 volt 3 phase 50 hz/575 volt 3 phase 60 hz
- Alignment turntable cut outs in tracks
- Rolling hydraulic jacking beam

- · Rolling jacking platform
- Air lines plumbed into tracks
- Obstacle sensor package
- 115 volt duplex outlet
- Runway lighting
- Lockable main switch
- Electric solenoid down valve
- Audible descent alarm
- Drive through ramps
- 25 gallon rolling oil drain pan

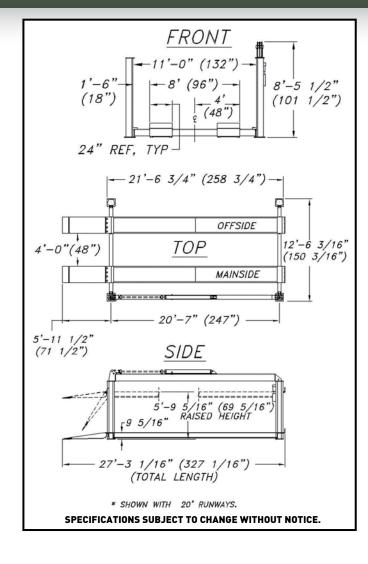

National Stock Number 4910-01-424-8934 (NSN) AS SEEN IN GSA ADVANTAGE

SIN #253-23 • CAGE CODE-0C714 • DUNS #10-128-9916

Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.

MOHAWK LIFTS

Mohawk Lifts, LLC. P.O. Box 110 65 Vrooman Ave Amsterdam, NY 12010 (800) 833-2006 (518) 842-1431 FAX: (518) 842-1289 AVAILABLE UNDER DISCOUNTED GOVERNMENT CONTRACT IN ALL 50 STATES





ValuePoint



DISTRIBUTED BY: