
PARALLELOGRAM SPECIFICATIONS

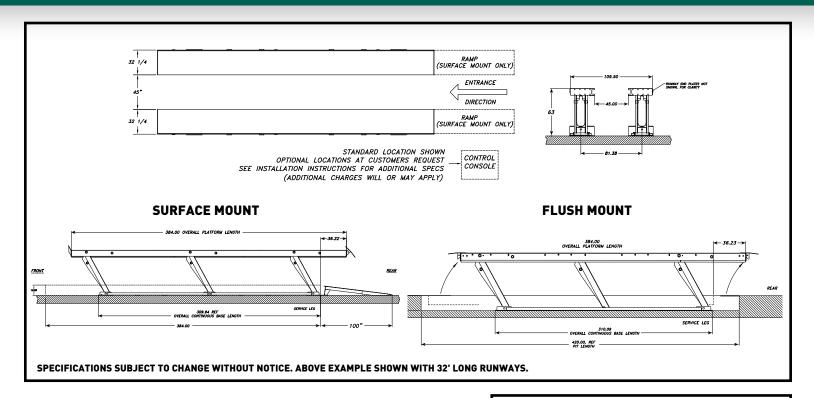

Capacities 50,000, 75,000 & 100,000 lbs

Track Lengths 32', 35', 42' or 48'

(lengths available dependendent on capacity)

Approach Ramp length 100" (2.54m) - standard (shorter or longer or

portable available)

Overall Length (SM model) 34'6" to 56'4"(10.52 to 17.17 meters)

Lifting Height (stroke) 63" SM or 79" FM (1.60m SM or 2.00m FM)

Lowered Height 13" (.33m) on SM or 16" (.41m) on FM

 Track Width
 32" (.81m)

 Overall Width
 109 1/2" (2.78m)

 Width Between Platforms
 44" (1.12m)

Lifting Speed 60 Seconds

Power Requirements 20 H.P. 220/440/575 volt 3 Phase motor

Horizontal Movement 36 1/8" (.92m) @ full stroke

Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.

Mohawk lifts are manufactured in compliance with the following standards: ALI, ANSI, ASME, AISI, ASTM, ASA, NEC, AWG, NEMA.

MEETS CURRENT NATIONAL ANSI CODE FOR LIFTS.

OPTIONAL EQUIPMENT

- · Rolling Jack/Jacking Platforms
- Track Lighting
- Air/Hydraulic Tire Dolly
- Keyed Control Lock-Out
- Stainless Steel Bases
- Marine Paint (Rustoleum standard)
- Drive Thru Ramps
- Track Tape Switch-Shut Off
- Air Inflatable Movable Approach Ramps

SM = Surface Mount Model FM = Flush Mount Model

THESE LIFTS CONFORM TO ANSI/ALI STANDARDS





For more detailed product information read this book at www.mohawklifts.com.

MOHAWK LIFTS

Mohawk Lifts, LLC. P.O. Box 110 65 Vrooman Ave Amsterdam, NY 12010 (800) 833-2006 (518) 842-1431 FAX: (518) 842-1289 AVAILABLE UNDER DISCOUNTED GOVERNMENT











DISTRIBUTED BY: