

7,000 LB. CAPACITY TURF MAINTENANCE LIFT

Capacity.....	7000 lbs. (3175.2Kg)
Lifting Speed.....	45 seconds
Motor Rating.....	2.0 HP/208-230 VAC, single- phase (3 phase optional)
Synchronization.....	Hydraulic fluid displacement using no chains, cables, or overhead obstructions
Overall Width.....	11'10 3/8" (3.61m)
Width Between Posts.....	10' (3.0m)
Column Height.....	8'7 1/2" (2.62m)
Overall Hydraulic Line Height.....	12' (3.66m) Standard (adjustable to accommodate any ceiling height or routed in shop floor)
Weight.....	2900 lbs. (907.2 Kg)
Concrete Floor Requirements.....	4000 PSI (27586.2 kPa) mix 4 1/2" (11.43 cm) depth
Anchoring System.....	(16) 3/4" x 5" (1.90 x 12.7 cm) bolts
Mechanical Safety Locks.....	Automatic; all position ; starting at 3" (7.62 cm) off the floor
Hydraulic Safety Systems.....	Automatic; all position
Cylinders.....	2 (1 per column)
Drive System.....	#646 leaf chain routed over cylinders
Steel Carriage Bearings.....	8 per carriage, double-sealed, self lubricating (16 total)
Floor Access Between Posts.....	Clear and unobstructed
Warranty.....	5 years, plus limited lifetime cylinder seal warranty



www.facebook.com/mohawklifts



**For more detailed product information
read this book at www.mohawklifts.com/wmamam**


MOHAWK

Mohawk Resources, LTD.
P.O. Box 110
65 Vrooman Ave
Amsterdam, NY 12010
(800) 833-2006
(518) 842-1431
FAX: (518) 842-1289
www.mohawklifts.com



GSA
contract
#GS-07F-
207AA

AVAILABLE UNDER
DISCOUNTED
GOVERNMENT
CONTRACT IN ALL
50 STATES

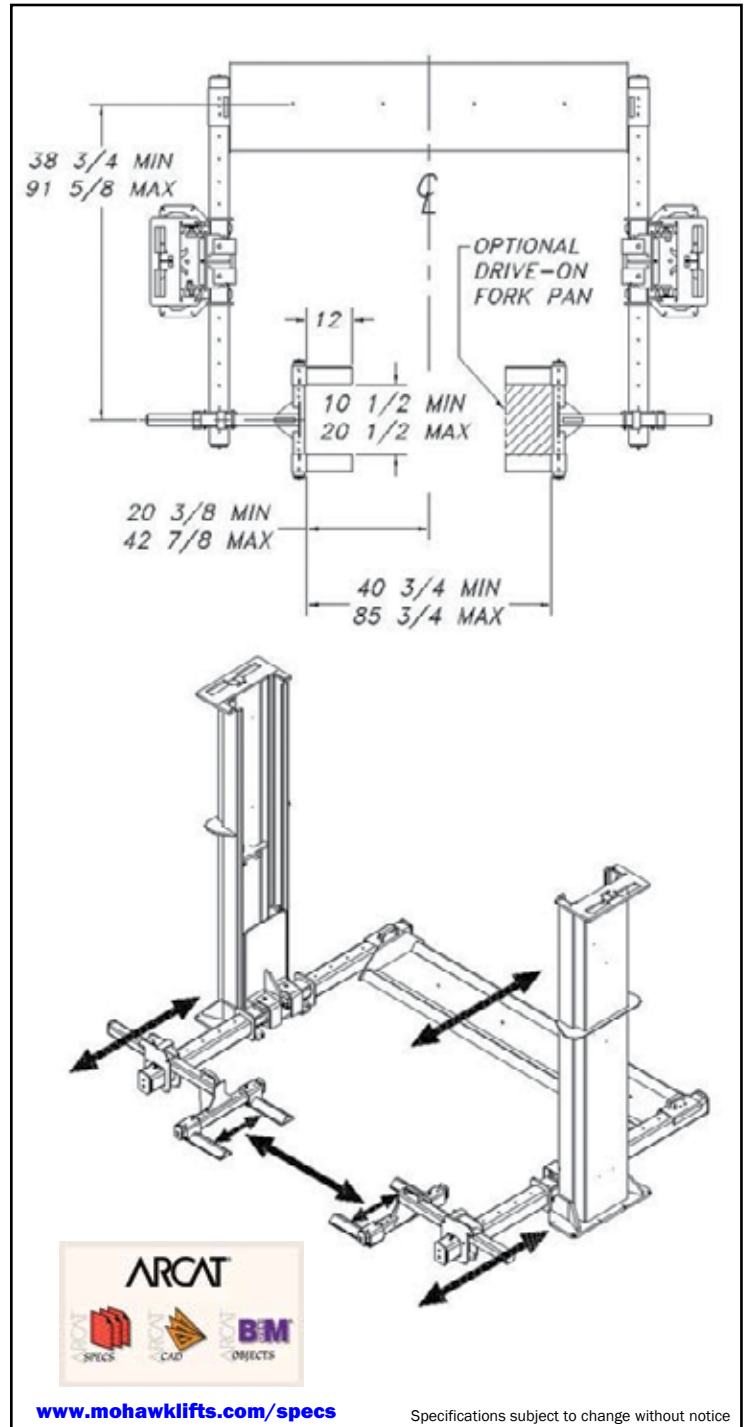

www.mohawklifts.com/specs

Specifications subject to change without notice

DISTRIBUTED BY: