



12806 170 Street, Unit 16 Edmonton, AB T5L 1H7
Phone: 780-628-0845 www.quantumlift.ca

ATLAS Platinum PVL14OF-EXT ALI Certified Open Front Alignment Lift



EXCLUSIVE FEATURES

- ALI Certified Lift
- 14,000 lb. Capacity
- Heavy Duty, Commercial Grade
- Alignment Lift, Includes Built in Slip Plates & Turntables
- Open Front Design for Better Access
- Extra Long Runways
- Adjustable Lock Ladder Design
- Higher Quality Powder Coat Finish
- Air Operated Single Point Lock Release (External Air Supply Required)
- Lock Ladder Design
- Double Lock Safety System
- Powder Coat Finish
- Steel Approach Ramps Included
- Mounting Hardware Included
- Standard with Premium ALLY Powerunit
- 220volt/1phase Electric Operation (Requires a 30amp Breaker)
- Shipping Weight: 4,462 LB.
- 5 yr Structural – 2 yr Hydraulic – 2 yr Powerunit Warranty





SPECIFICATIONS

Capacity - 14,000 LB.

Lifting Height (On Locks) - 73 1/4" (6' 1 1/4")

Clearance Under Runways - 66 1/4" (5' 6 1/4")

Overall Width (With Motor) - 148 3/4" (12' 4 3/4")

Overall Width (Without Motor) - 140 1/8" (11' 8 1/8")

Overall Length with Approach Ramps - 272 1/8" (22' 8 1/8")

Overall Length without Approach Ramps - 234 1/4" (19' 6 1/4")

Length of Approach Ramps - 47" (3' 11")

Drive- Thru - 94 1/2" (7' 10 1/2")

Air Requirement - 85-115 PSI (external air supply required)

Motor/Electrical Requirement 220 volt single (1) phase. A 30 amp breaker is recommended

Runway Length - 223 1/2" (18' 7 1/2")

Width Between Runway Rails - 42 3/4" (w/ rail 3 1/4")

Outside Runway to Outside Runway - 83 1/8" (6' 11 1/8")

Runway Width - 20"

Thickness of Runway - 7"

Width Between Runways - 42 3/4" (3' 6 3/4")

Height of Columns (NOT Including Threaded Shaft)

Rear: 90 1/2" (7' 6 1/2")

Front: 109 1/4" (9' 1 1/4")

Column Dimension

Rear: 5" X 6 1/2"

Front: 7 1/2" X 9 3/4"

Base of Column

Rear: 9" X 10 3/8"

Front: 18" X 16"

Clearance Between Columns

Rear: 116 3/8" (9' 8 3/8")


Front: 117 3/8" (9' 9 3/8")


Maximum Wheel Base - 203" (16' 11")




Oil Requirement - 3-5 Gallons AW32/AW46

Shipping Weight - 4,462 lbs.

Requires a minimum of 6" of concrete with a 3000 psi. rating

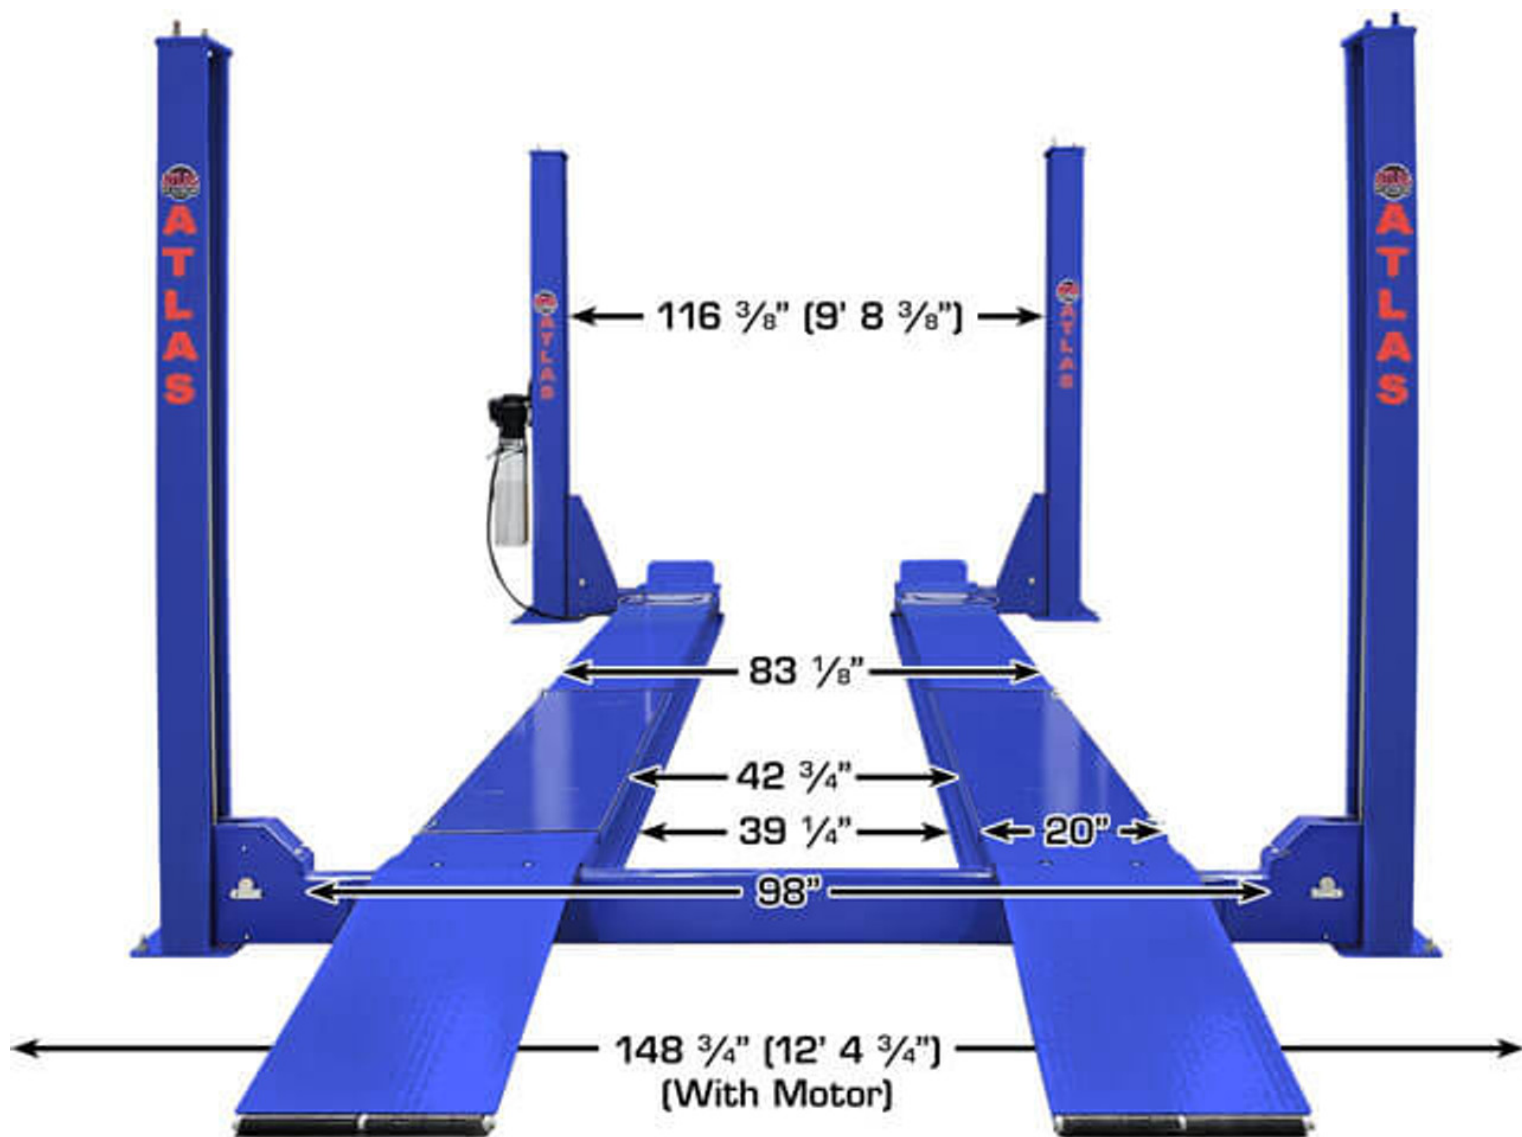

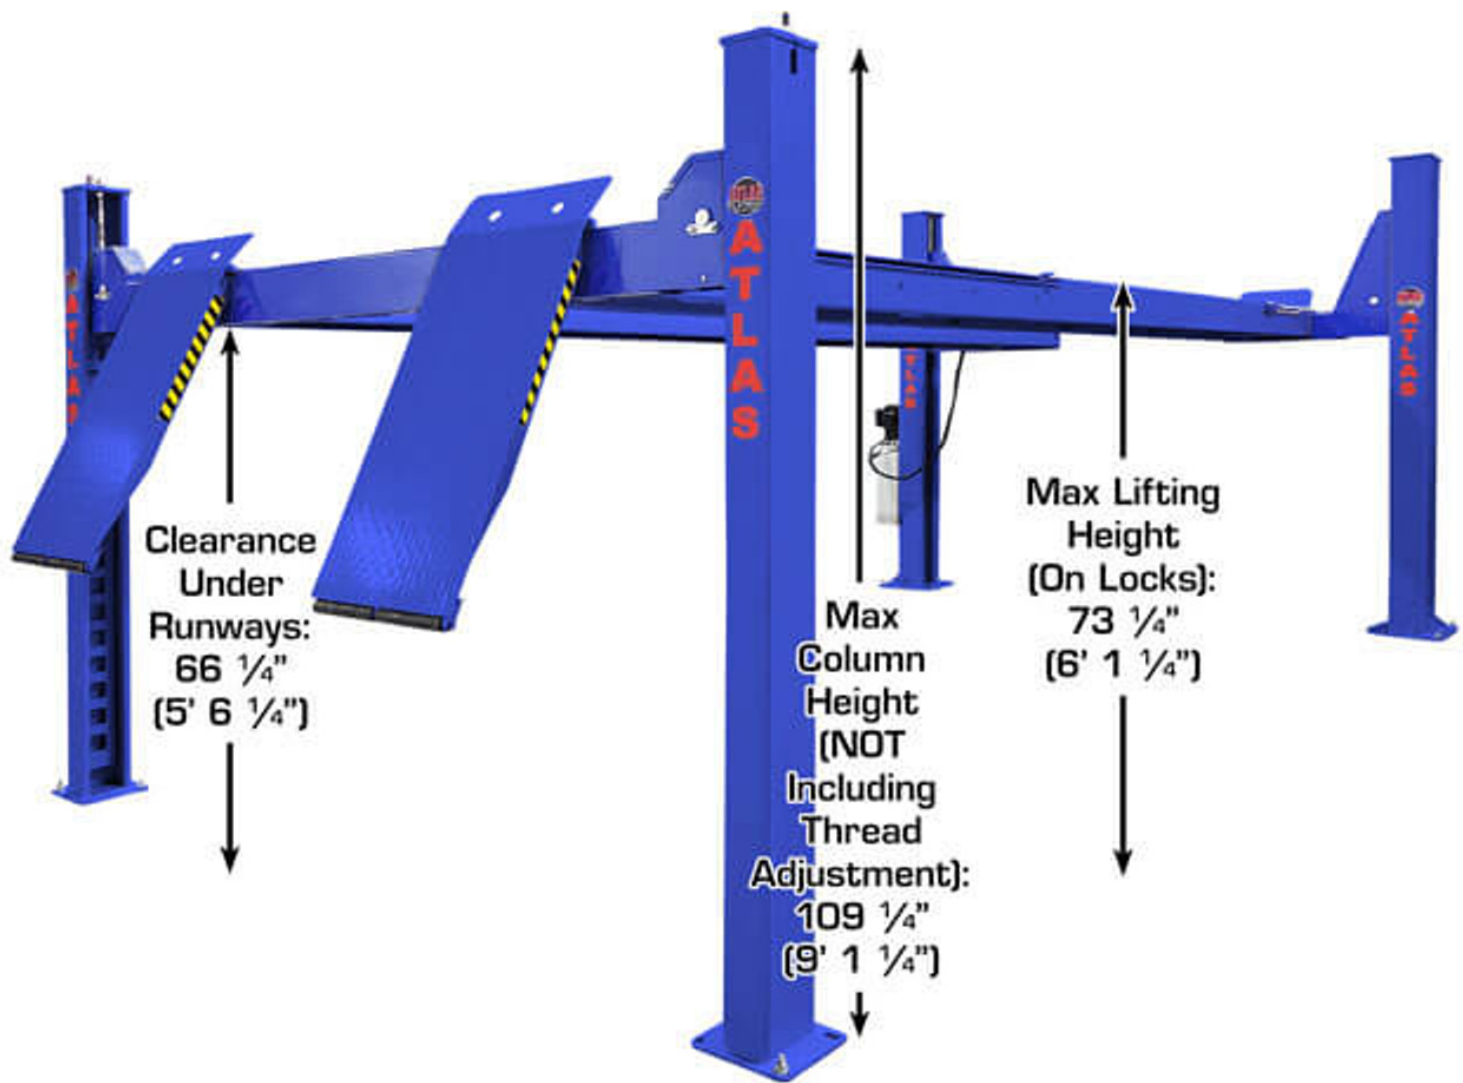

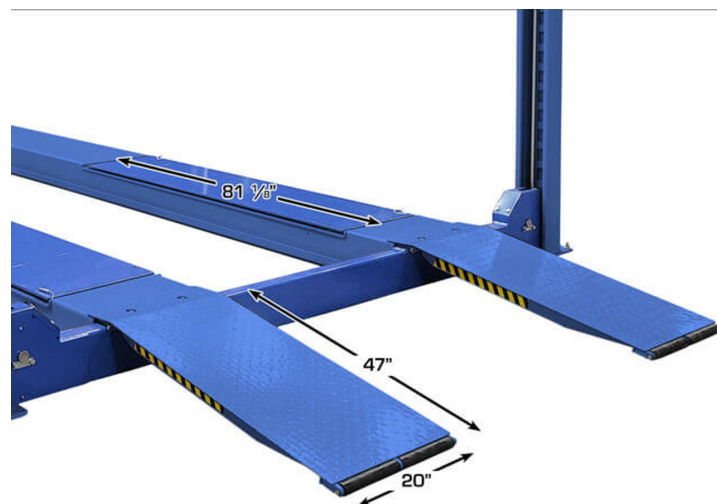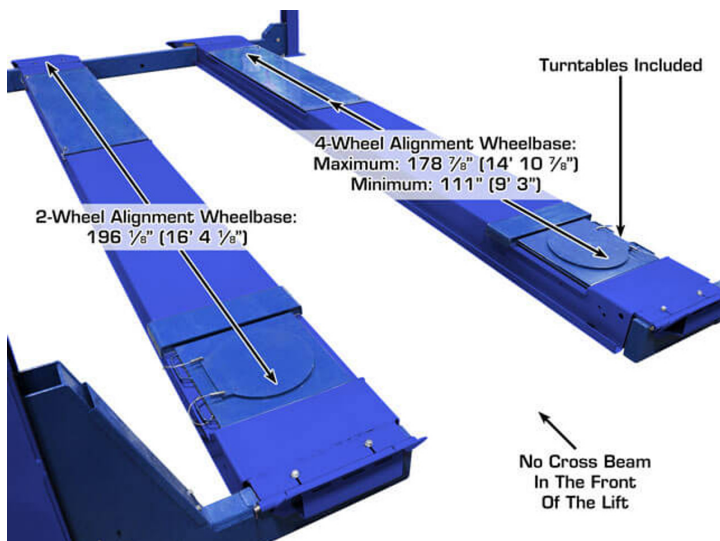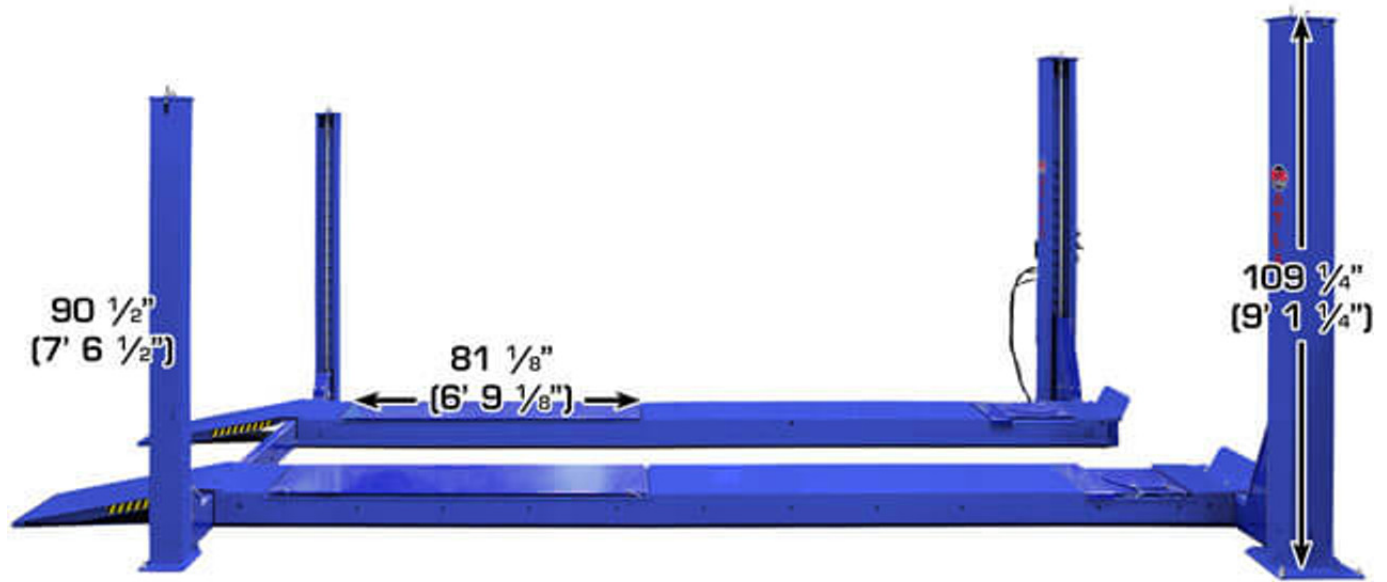

Optional Accessory 7,000lbs Capacity Rolling Center Jack

