



12806 170 Street, Unit 16 Edmonton, AB T5L 1H7 Phone: 780-628-0845 www.quantumlift.ca



ATLAS BP12000 Two Post Bottom Plate Lift (12,000lbs Capacity)






Highlights

- 12,000 lb. Capacity
- Dual Hydraulic Chain-Drive Cylinders Made On ANSI Standard
- Self-Lubricating HMW Polyethylene Sliders and Bronze Bushings
- Single-Point Release Allows Both Columns To Be Disengaged Simultaneously
- Symmetric Arms
- Base Plate Design
- Powder Coat Finish
- Mounting Hardware Included
- Automatic Arm Restraints
- Free 12 Piece Truck Adapter Set
- 5- Year Structural Warranty, 2 Year Hydraulic Cylinder Warranty, and 1 Year Power Unit Warranty
- Shipping Weight: 2,300 LB.

Shipping Weight: 2,300 LB.





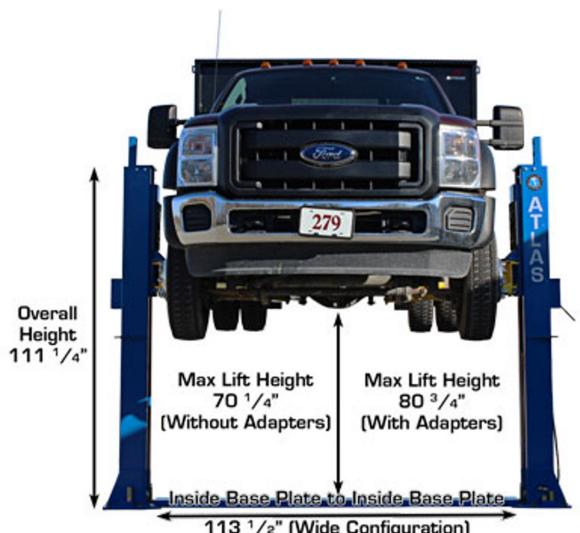

113 1/2" (Wide Configuration) 108 1/8" (Narrow Configuration)




Ceiling Height

122 1/2"


(Not On

Lock)

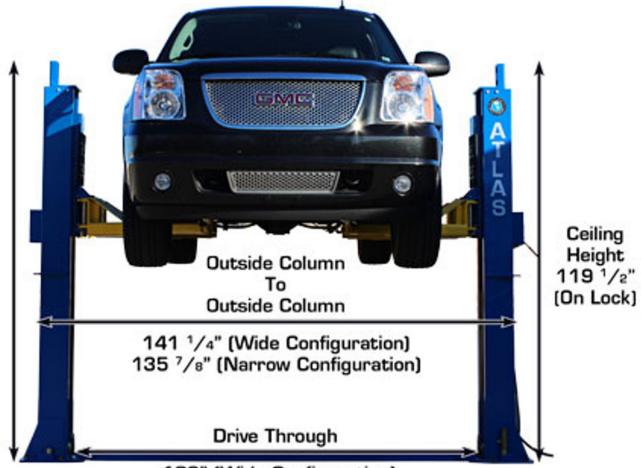

109" (Wide Configuration) 103 5/8" (Narrow Configuration)



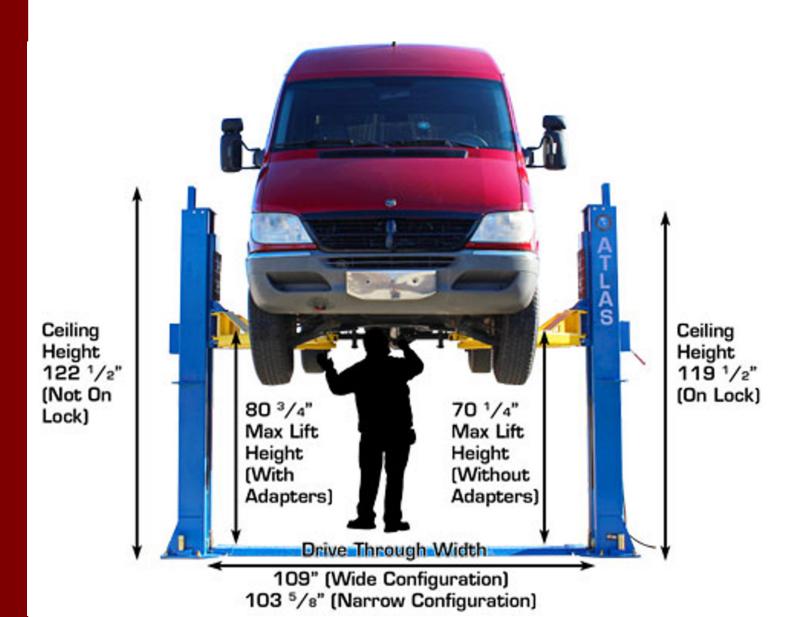



Specifications

Capacity-12,000 LB.

Overall Height - 122 1/2" (10' 2 1/2")

Overall Floor Width-149 3/8" (12' 5 3/8") or 154 1/2" (12' 10 1/2")

Outside Column to Outside Column - 135 7/8" (11' 3 7/8") or 141 1/4" (11' 9 1/4")

Maximum Lift Height (Without Adapters) - 77 1/2"

Maximum Lift Height (With Adapters) - 88 1/2"

Minimum Arm Height - 4"

Inside Column - 118 1/8" (9' 10 1/8") or 123 1/2" (10' 3 1/2")

Drive Thru - 103 5/8" (8' 7 5/8") or 109" (9' 1")

Column Size - 8 3/4" x 14"

Column Thickness of Steel - 6mm

Base Of Lift - 18 1/2" x 21 1/2"

Motor/Electrical Requirement - 220 volt single (1) phase. A 30 amp breaker is recommended

Oil Requirement - 3-5 Gallons AW32/AW46 (NOT INCLUDED)

Shipping Weight - 2,130 LBS.

Adapter Heights - 4 Each 2", 3", 6"

Arm Hole/Adapter Peg Size - 1.5"