



Quantum
Lift

12806 170 Street, Unit 16 Edmonton, AB T5L 1H7
Phone: 780-628-0845 www.quantumlift.ca

Apex 8 ALI Certified Hobbyist 8,000 Lb. Capacity Four Post Parking Lift



HIGHLIGHTS

- **ALI Certified**
- **8,000 lb. Capacity**
- **Atlas Powder Coat Finish**
- **Single Point Lock Release**
- **Lock Ladder Design**
- **Double Lock Safety System**
- **Anchor Bolts Optional (Sold Separately)**
- **Steel Approach Ramps (Included)**
- **Four Wheel Stops (Included)**
- **Two Rubber Wheel Chocks (Included)**
- **Caster Kit With Polyurethane Wheels (Included)**
- **Drip Trays (Included)**
- **Jack Trays (Included)**
- **Perfect For Storing Or Working On Vehicles**
- **Shipping Weight: 1,800 lbs.**





Specifications:

Capacity - **8,000 lb.**

Lifting Height To Top of Runway - **72" (6')**

Clearance Under Runways - **67 1/2" (5' 7 1/2")**

Height of Columns (Including Nuts) - **87 1/2" (7' 3 1/2")**

Overall Width (Without Motor or Casters) - **104 1/4" (8' 8 1/4")**

Overall Width (With Motor) - **114 1/2" (9' 6 1/2")**

Overall Length without Approach Ramps (Including Lock Release Bar)- **186 1/2" (15' 6 1/2")**

Overall Length with Approach Ramps (Including Lock Release Bar)- **219 1/2" (18' 3 1/2")**

Approach Ramps - **37 1/2" (3' 1 1/2")**

Runway Width - **18 3/4"**

Runway Rail Width - **2 1/2"**

Runway Length - **165 1/2" (13' 9 1/2")**

Runway Thickness - **4 1/2"**

Width Between Runways - **38" (3' 2")**

Width Between Runway Rails - **33" (2' 9")**

Outside Runway to Outside Runway - **75 1/4" (6' 3 1/4")**

Size of Column - **6" x 3 3/8"**

Clearance Between Columns - **96" (8')**

Length Between Columns - **157 3/4" (13' 1 3/4")**

Base of Column - **11 1/2" x 9 3/4"**

Maximum Wheel Base - **153 1/2" (12' 9 1/2")**

Drive Thru (Outside of tire to outside of tire) - **80 1/4" (6' 8 1/4")**

Cable Diameter - **7/16" (.4375")**



Gauge of Steel - **6 Gauge (.1875" / 3/16" / 4.75mm)**



Motor/Electrical Requirement = **110 Volt, Single (1) Phase;**



A 30 amp Breaker Is Recommended


Oil Requirement - **2.6 Gallons AW32/AW46**

Shipping Weight - **2,000 lb.**

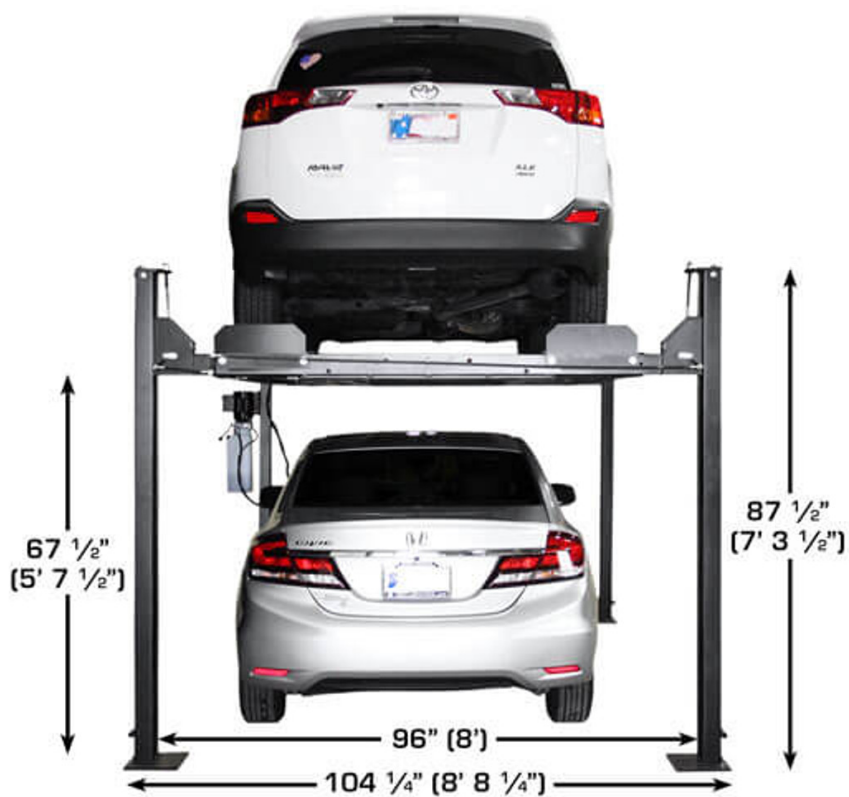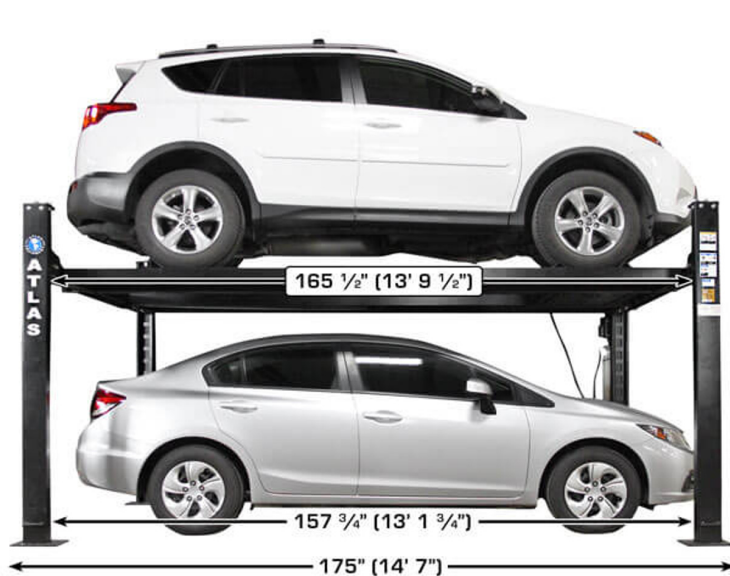

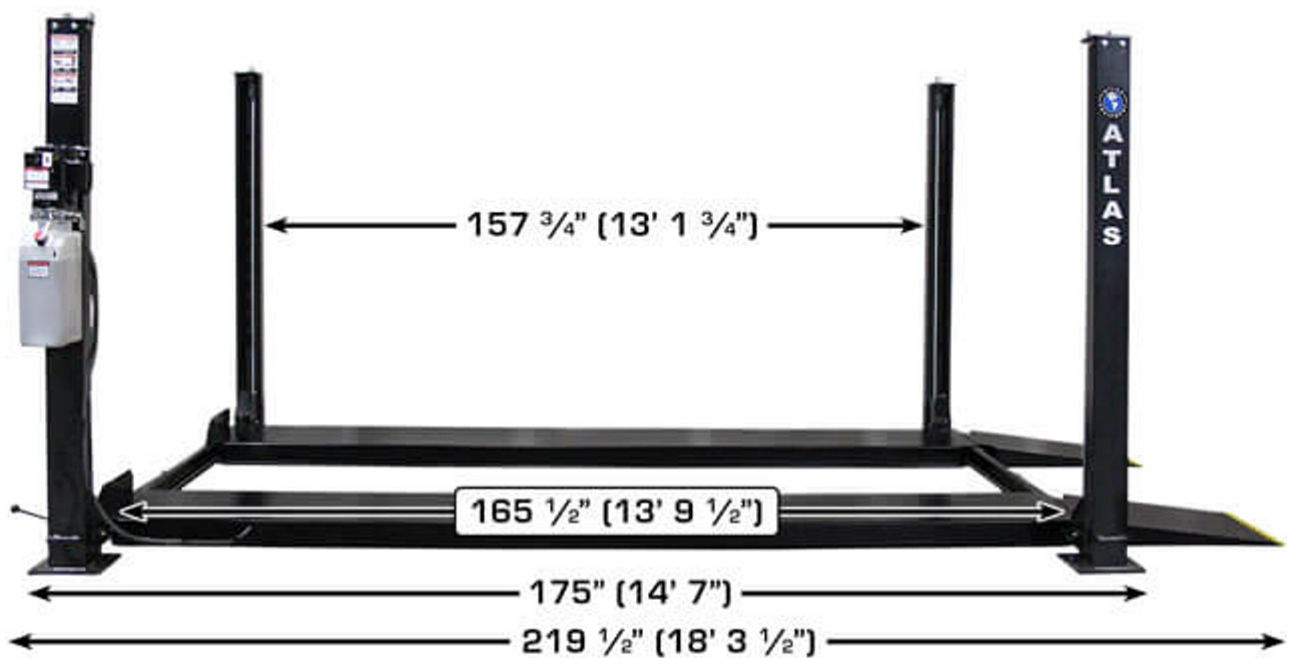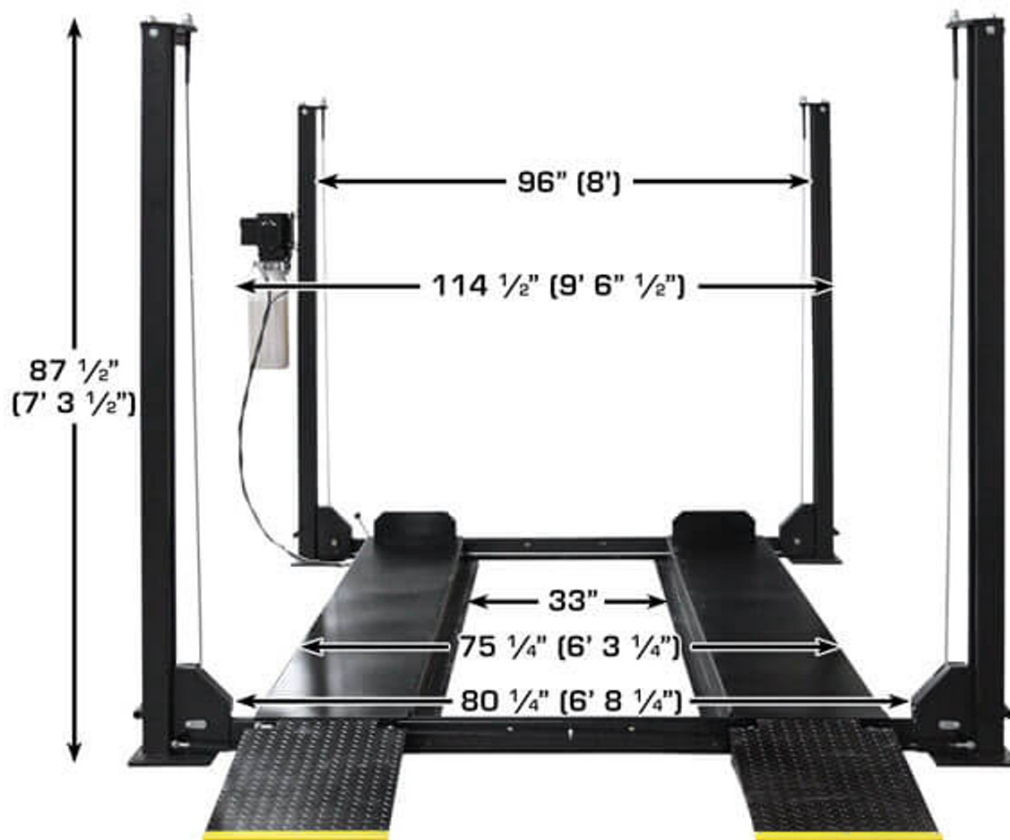

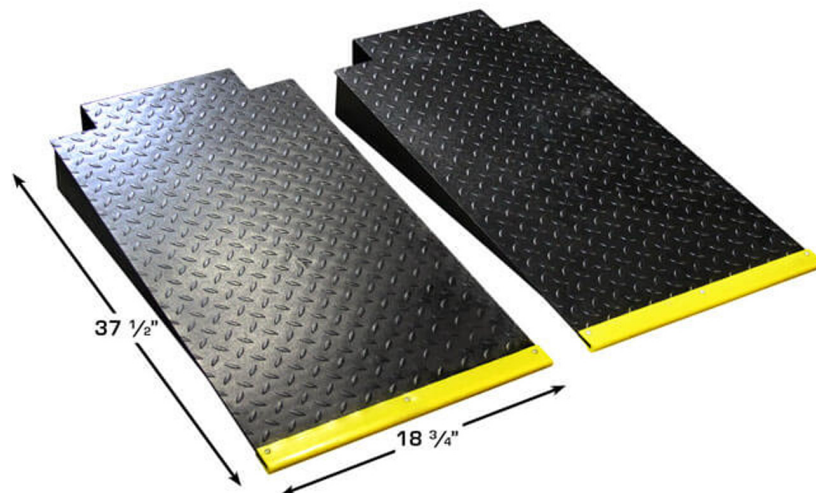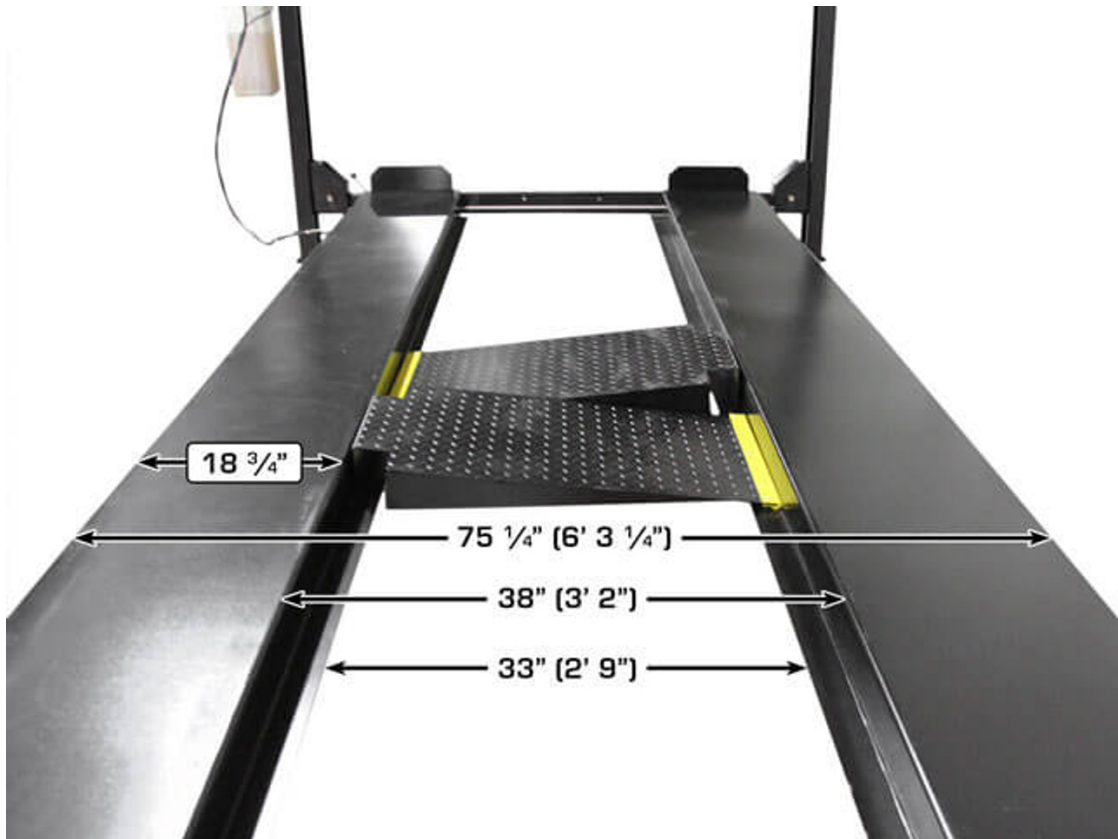

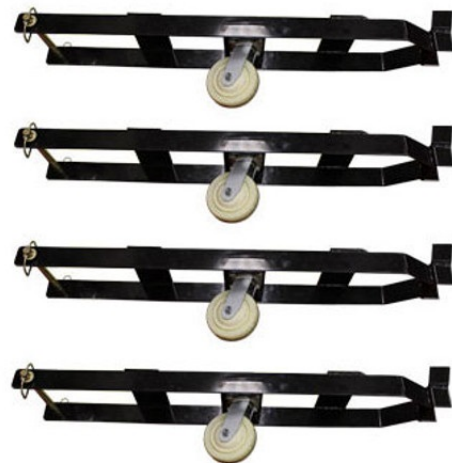

Caster Kit With Polyurethane Wheels




Jack Tray



Free Wheel Chocks Included

Shipping Dimensions

Atlas APEX 8 Four Post Lift
Ready To Ship Or Be Picked Up

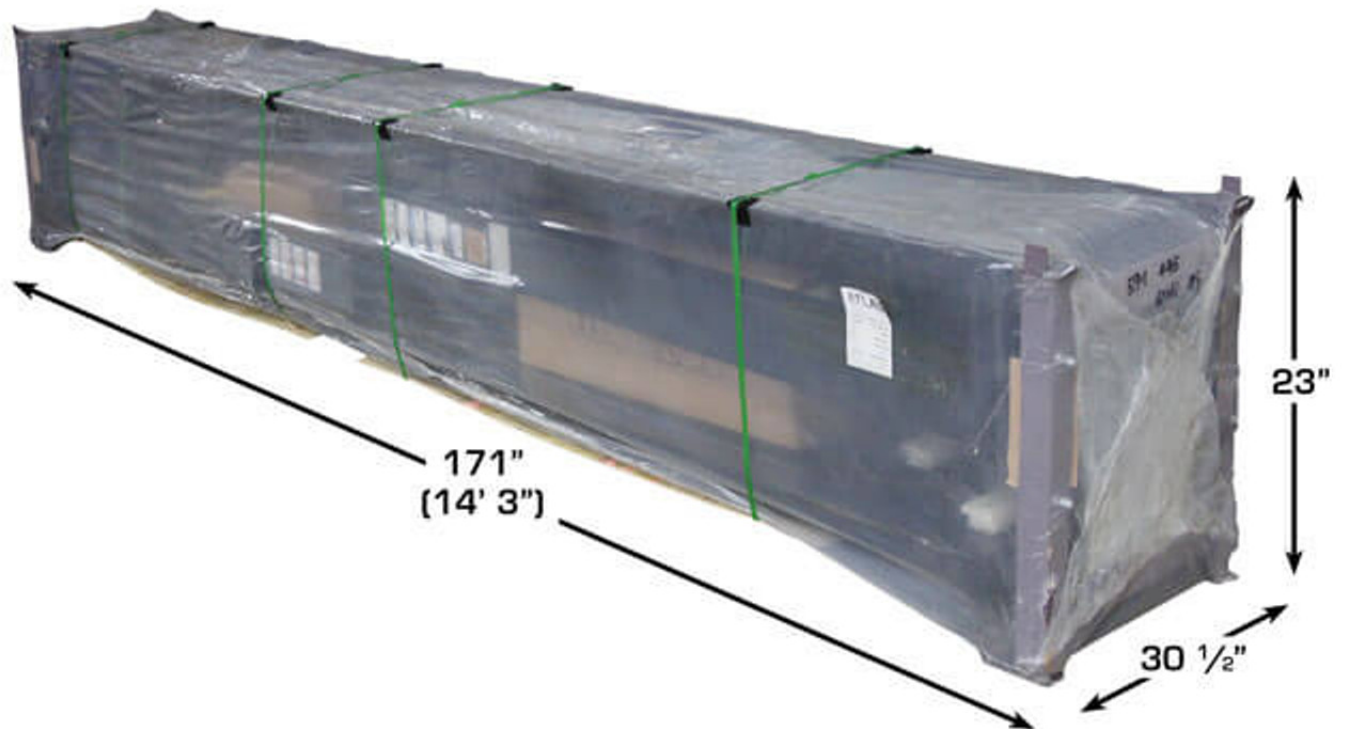

Shipping Weight: 1800 LBS

WARRANTY

5 Year Structural & 2 Year Hydraulic Warranty This Atlas® product is warranted for five (5) years on structural components two (2) years on hydraulics, and one (1) year on electric or air / hydraulic power units effective from date of invoice. Wear items carry a 90 day warranty. Our LIMITED warranty policy does not include a labor warranty