

Quantum
Lift

12806 170 Street, Unit 16 Edmonton, AB T5L 1H7
Phone: 780-628-0845 www.quantumlift.ca



ATLAS Apex 8

Extra Long & Extra Tall

Hobbyist Four Post Lift

ALI Certified



HIGHLIGHTS


- ALI Certified
- 8,000 lb. Capacity
- Atlas Powder Coat Finish
- Single Point Lock Release
- Lock Ladder Design
- Double Lock Safety System
- Anchor Bolts Optional (Sold Separately)
- Steel Approach Ramps (Included)
- Four Wheel Stops (Included)
- Two Rubber Wheel Chocks (Included)
- Caster Kit With Polyurethane Wheels (Included)
- Drip Trays (Included)
- Jack Trays (Included)
- Perfect For Storing Or Working On Vehicles
- Shipping Weight: 1,800 lbs.








SPECIFICATIONS

Lifting Height	84" (7')
Overall Width (Without Motor)	108" (9')
Overall Width (With Motor)	116 1/2" (9' 8 1/2")
Length Between Columns	176 1/2" (14' 8 1/2")
Overall Length with Approach Ramps	222" (18' 6")
Overall Length without Approach Ramps	185"
Approach Ramps	37" (3' 1")
Total Runway Width	22" (w/ Rails) or 18 3/4" (Driving Surface)
Runway Length	185" (15' 5")
Runway Thickness	4 1/2"
Width Between Runways	38" (3' 2")
Width Between Runway Rails	34" (2' 10")
Outside Runway to Outside Runway	77 3/4" (6' 5 3/4")
Clearance Under Runways	78 1/2" (6' 6 1/2")
Size of Column	98 1/2" (8' 2 1/2")
Clearance Between Columns	98" (8' 2")
Base of Column	98 1/2" (8' 2 1/2")
Height of Columns	98 1/2" (8' 2 1/2")
Maximum Wheel Base	173" (14' 5")
Drive Thru (Outside of tire to outside of tire)	84" (7')
Cable Diameter	.350"
Gauge Of Steel	6 Gauge (.1875" / 3/16" / 4.75mm)
Motor	110 Volt - 30 Amp Breaker is Required
Oil Requirement	3-5 Gallons AW32/AW46
	2139 LB.
Shipping Weight and Dimensions	187 x 23.62 x 28.82

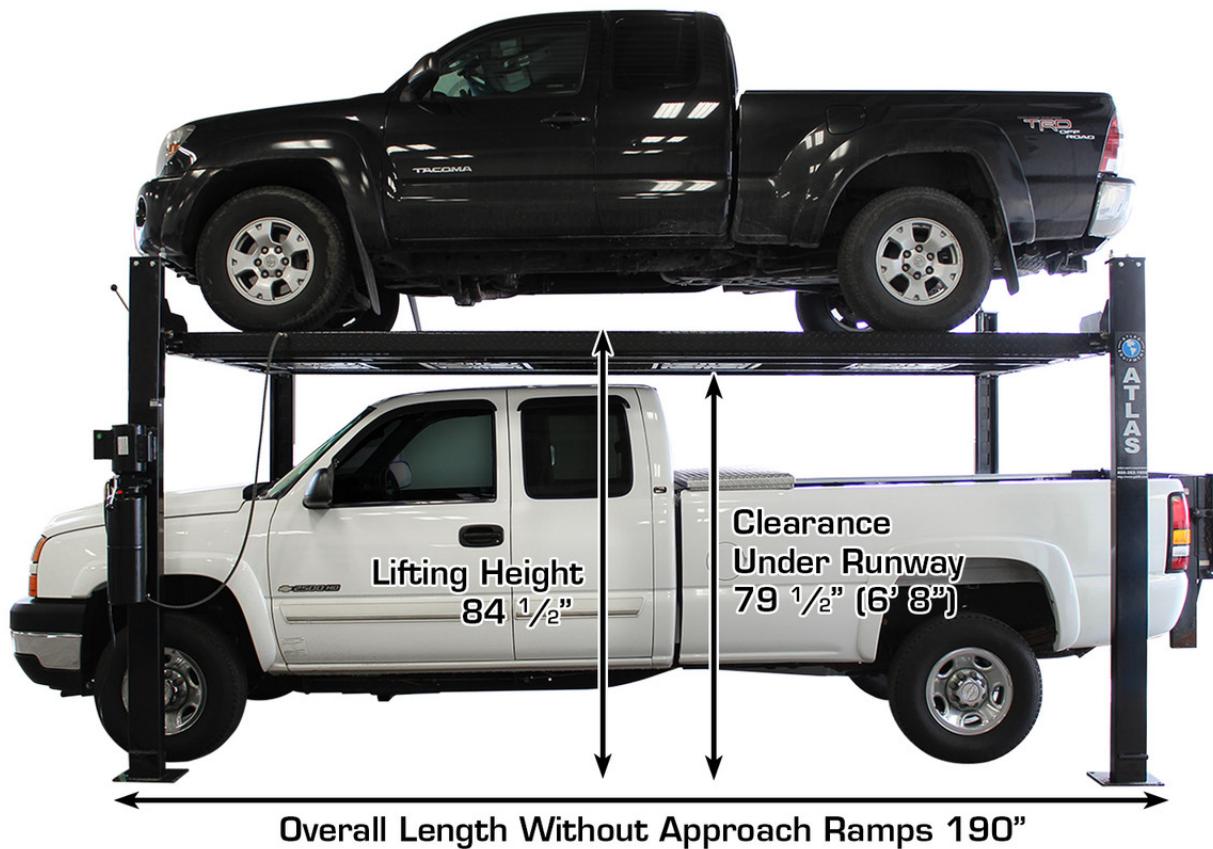

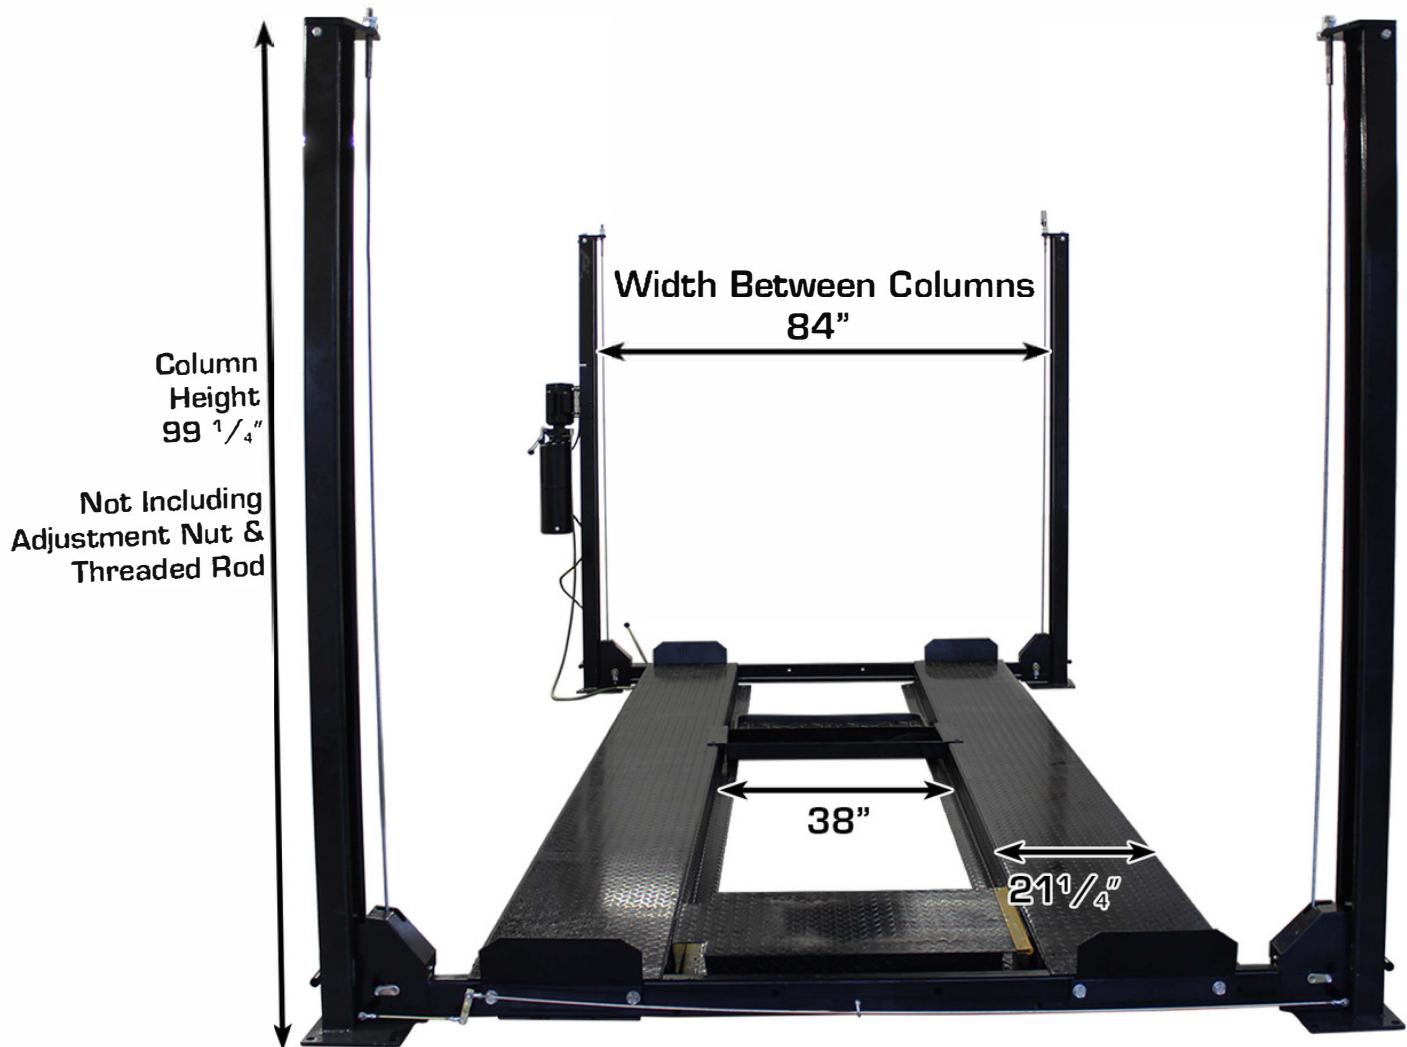

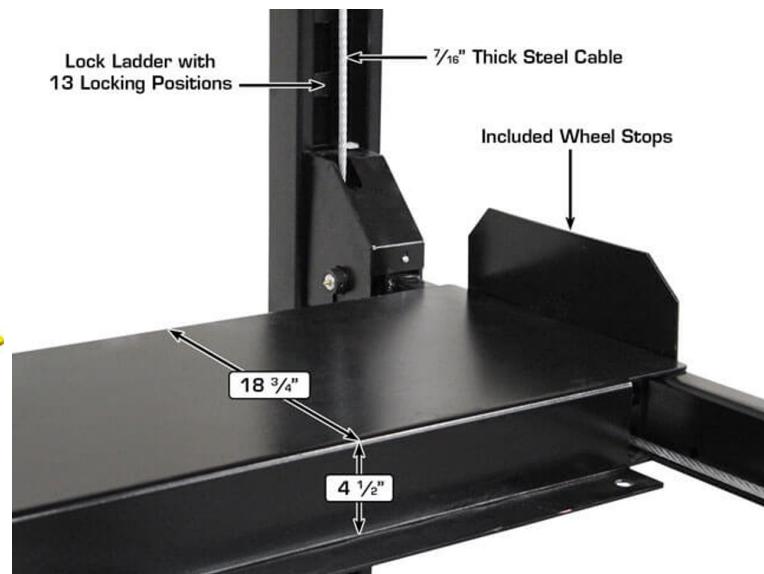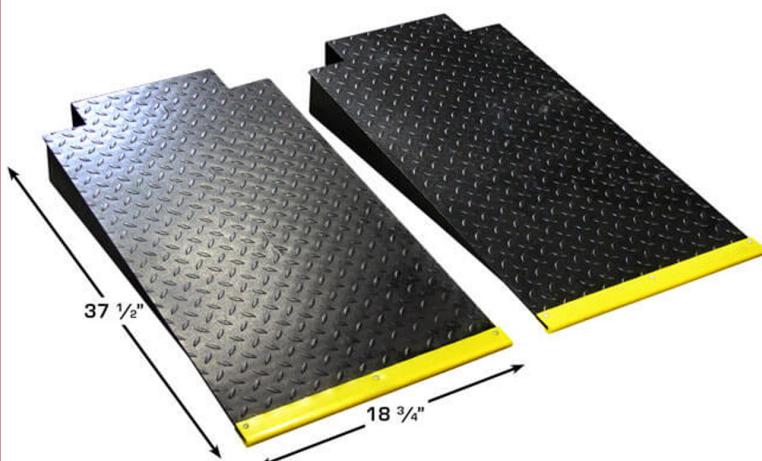

Included Caster Kit With Polyurethane Wheels
Can Be Installed Or Removed In Minutes

Do NOT Move Your Lift With A Vehicle On The Runway



Free Wheel Chocks Included