



12806 170 Street, Unit 16 Edmonton, AB T5L 1H7 Phone: 780-628-0845 www.quantumlift.ca




ATLAS 9KOH Overhead 9,000 lbs. Capacity Two Post Lift








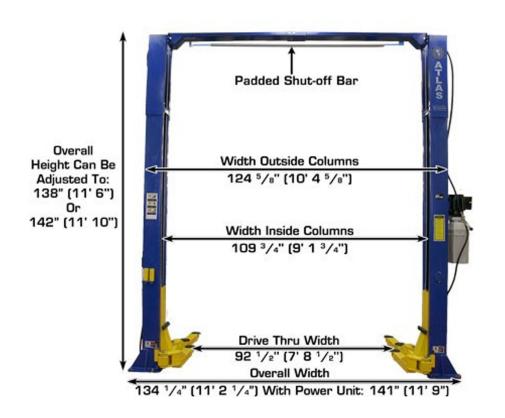



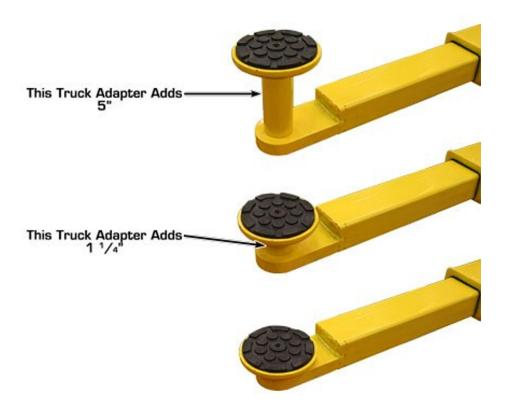











Highlights

- 9,000 LB. Capacity
- "Padded" Shut-Off Bar
- Light Commercial Grade
 - Clear Floor Design
- Asymmetric Arm Design
- Dual Hydraulic Chain-Drive Cylinders
 - Powder Coat Finish
 - Secondary Lock System (SLS)
 - Dual Point Lock Release
 - Automatic Arm Restraints
 - Free 8 Piece Truck Adapter Set
 - Mounting Hardware Included
 - Shipping Weight: 1,450 lbs.

Warranty

"This item is warranted for two (2) year on structural components and one (1) year on air or electric hydraulic power units, pneumatic power units, cylinders, and major components from the date of invoice




Specifications

```
Capacity - 9,000 LB.
Overall Height - 138" (11' 6") or 142" (11' 10")
Overall Floor Width - 134 1/2" (11' 2 1/2")
Outside Column to Outside Column - 124 7/8" (10' 4 7/8")
Maximum Lift Height (Without Adapters) - 74 1/2"
Maximum Lift Height (With Adapters) - 81"
Minimum Arm Height - 4"
Inside Column - 110" (9' 2")
Drive Thru - 100" (8' 4") Symmetric/ 90 1/2" (7' 6 1/2")
Asymmetric
Column Size - 7 1/4" x 11"
Column Thickness of Steel - 5mm
Base Of Lift - 14 1/4" x 18"
Motor/Electrical Requirement 220 volt single (1) phase.
A 30 amp breaker is recommended
Oil Requirement - 3-5 Gallons AW32/AW46 (NOT INCLUDED)
Shipping Weight - 1,450 LBS.
Adapter Heights - 4 Each 1.5", 5"
Arm Hole/Adapter Peg Size - 1.5"
```

Requires a minimum of 4" of concrete with a 3000 psi. rating



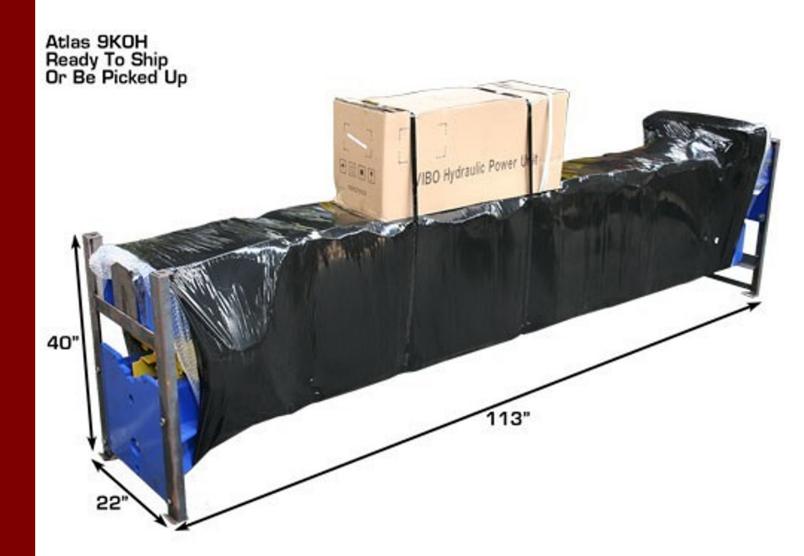

Shipping Weight: 1,450 LBS.