



12806 170 Street, Unit 16 Edmonton, AB T5L 1H7 Phone: 780-628-0845 www.quantumlift.ca



ATLAS Garage Pro 8000 EXT Four Post Lift 8,000lbs Capacity






HIGHLIGHTS

- 8,000 lb. Capacity
- Diamond Plated Runways
- Atlas Powder Coat Finish
- Single Point Lock Release
- Drip Trays Included
- Double Lock Safety System
- Lock Ladder Design
- Steel Approach Ramps (Included)
- Anchor Bolts Optional (Sold Separately)
- Caster Kit With Polyurethane Wheels (included)
- Steel Jack Tray (included)
- Rubber Wheel Chocks (included)
- Drip trays (Included)
- 2 Year Structural, 1 Year Hydraulic Warranty
- Perfect For Storing Or Working On Vehicles
- Shipping Weight: 1,739 lbs.

Included Accessories

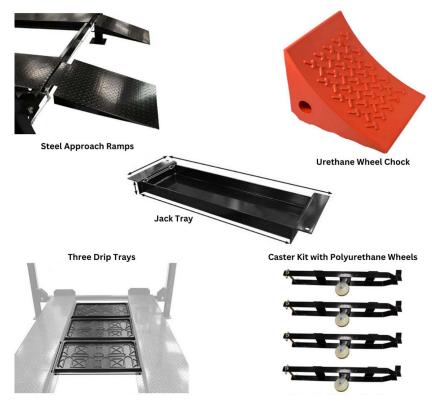



SPECIFICATIONS

Capacity - 8,000 LB Lifting Height - 84 1/4" (7' 1/4") Overall Width (Without Motor) - 104 3/8" (8' 8 3/8") Overall Width (With Motor) - 114" (9' 6") Length Between Columns - 157 1/2" (13' 1 1/2") Overall Length with Approach Ramps - 207 1/2" (17' 3 ½ ") Overall Length without Approach Ramps - 175 ½" (14' 7 ½") Approach Ramps - 36 3/8" (3' 3/8") Total Runway Width - 21 1/4" (1' 9 1/4") Runway Length - 165 1/2" (13' 9 ½ ") Runway Thickness - 5 1/4" Width Between Runways - 37 3/8" Width Between Runway Rails - 31 3/4" Outside Runway to Outside Runway - 74 3/4" (6' 2 1/4") Clearance Under Runways - 79" (6' 7") Size of Column - 6 1/4" x 3 3/8" Clearance Between Columns - 94 3/8" (7' 10 3/8") Base of Column - 9 5/8" x 11 1/2" Height of Columns - 98 1/2" (8' 2 1/2") Maximum Wheel Base - 153 ½" (12' 9 ½") Drive Thru (Outside of tire to outside of tire) - 80 ½ " (6' 8 ½ ") Cable Diameter - .350" Gauge Of Steel - 6 Gauge (.1875"/ 3/16" / 4.75mm) Motor - 110 Volt, 30 Amp Breaker is Required Oil Requirement - 3-5 Gallons AW32/AW46 Shipping Weight - 1,739 LB.















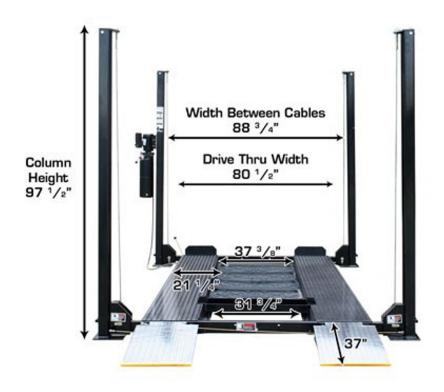

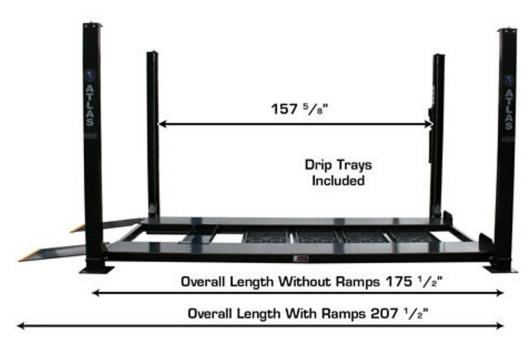



Optional Manual Operated Pro Jack 3500



Garage Pro 8000 EXT Ready To Be Shipped This Lift Can Be Lifted From The End Or In The Middle With A Fork Truck

Shipping Weight: 1739 LBS.

